


INSTRUCTION SHEET



KEPCO An ISO 9001 Company.

RA 79

MODEL RA 79 RACK ADAPTER

DESCRIPTION (Refer to Figure 1)

The Kepco Model RA 79 RACK ADAPTER is designed for the installation of Kepco Power Assemblies into a standard 19-inch (482.6mm) rack. The Rack Adapter occupies 7.00 inches (177.80 mm) of vertical space in the standard 19-inch equipment rack and is 24-inches (609.60 mm) deep. Mechanical dimensions, material and finish of the Kepco Model RA 79 Rack Adapter are provided in Figure 2.

The Rack Adapter may be mounted fixed or may be equipped with optional slides. The unit comes fitted with bracket spacers (shim bars for equipment slides), four rubber feet, a "U" shaped removable cover with fourteen mounting screws, Rack Adapter handles and Mounting Ears. Rack Adapter RA 79 was developed to provide mounting space for a multitude of Kepco's linear and switching power supplies. The Rack Adapter may be equipped with a variety of front panel and rear panel components to form a complete rack mounted power assembly, designed by the user.

The rack adapter is shipped with front panel for the lower half of unit installed. These are chosen by the customer from the selection below. **If no preference is indicated, the unit is shipped with the front Full Rack Vented panel installed.** Details about all available power supplies, panel components and accessories to be used with RA 79 Rack Adapter may be found in Kepco's Power Supplies Catalog, "Power Assemblies" Section. It is available from your Kepco Representative, or directly from Kepco, Inc., 131-38 Sanford Avenue, Flushing, N.Y. 11352, USA, or on our web site at:

www.kepcopower.com/custompa.htm

FRONT PANELS

| MODEL | KEPCO P/N | DESCRIPTION |
|-------|-----------|--------------------------------|
| FFP-A | 131-0820 | FRONT PANEL, FULL RACK, VENTED |
| FFP-B | 131-0782 | FRONT PANEL, FULL RACK, SOLID |


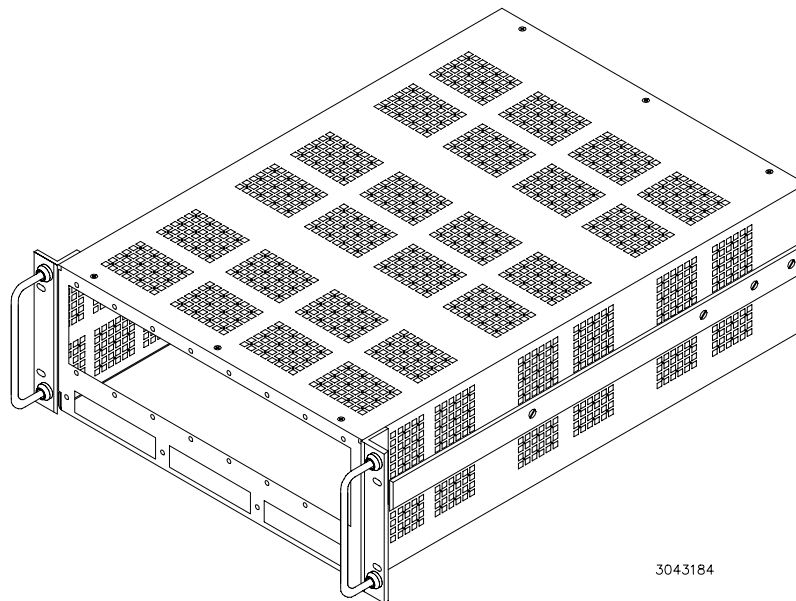


FIGURE 1. RA 79 RACK ADAPTER ASSEMBLY

KEPCO, INC. ● 131-38 SANFORD AVENUE ● FLUSHING, NY. 11352 U.S.A. ● TEL (718) 461-7000 ● FAX (718) 767-1102
<http://www.kepcopower.com> ● email: hq@kepcopower.com

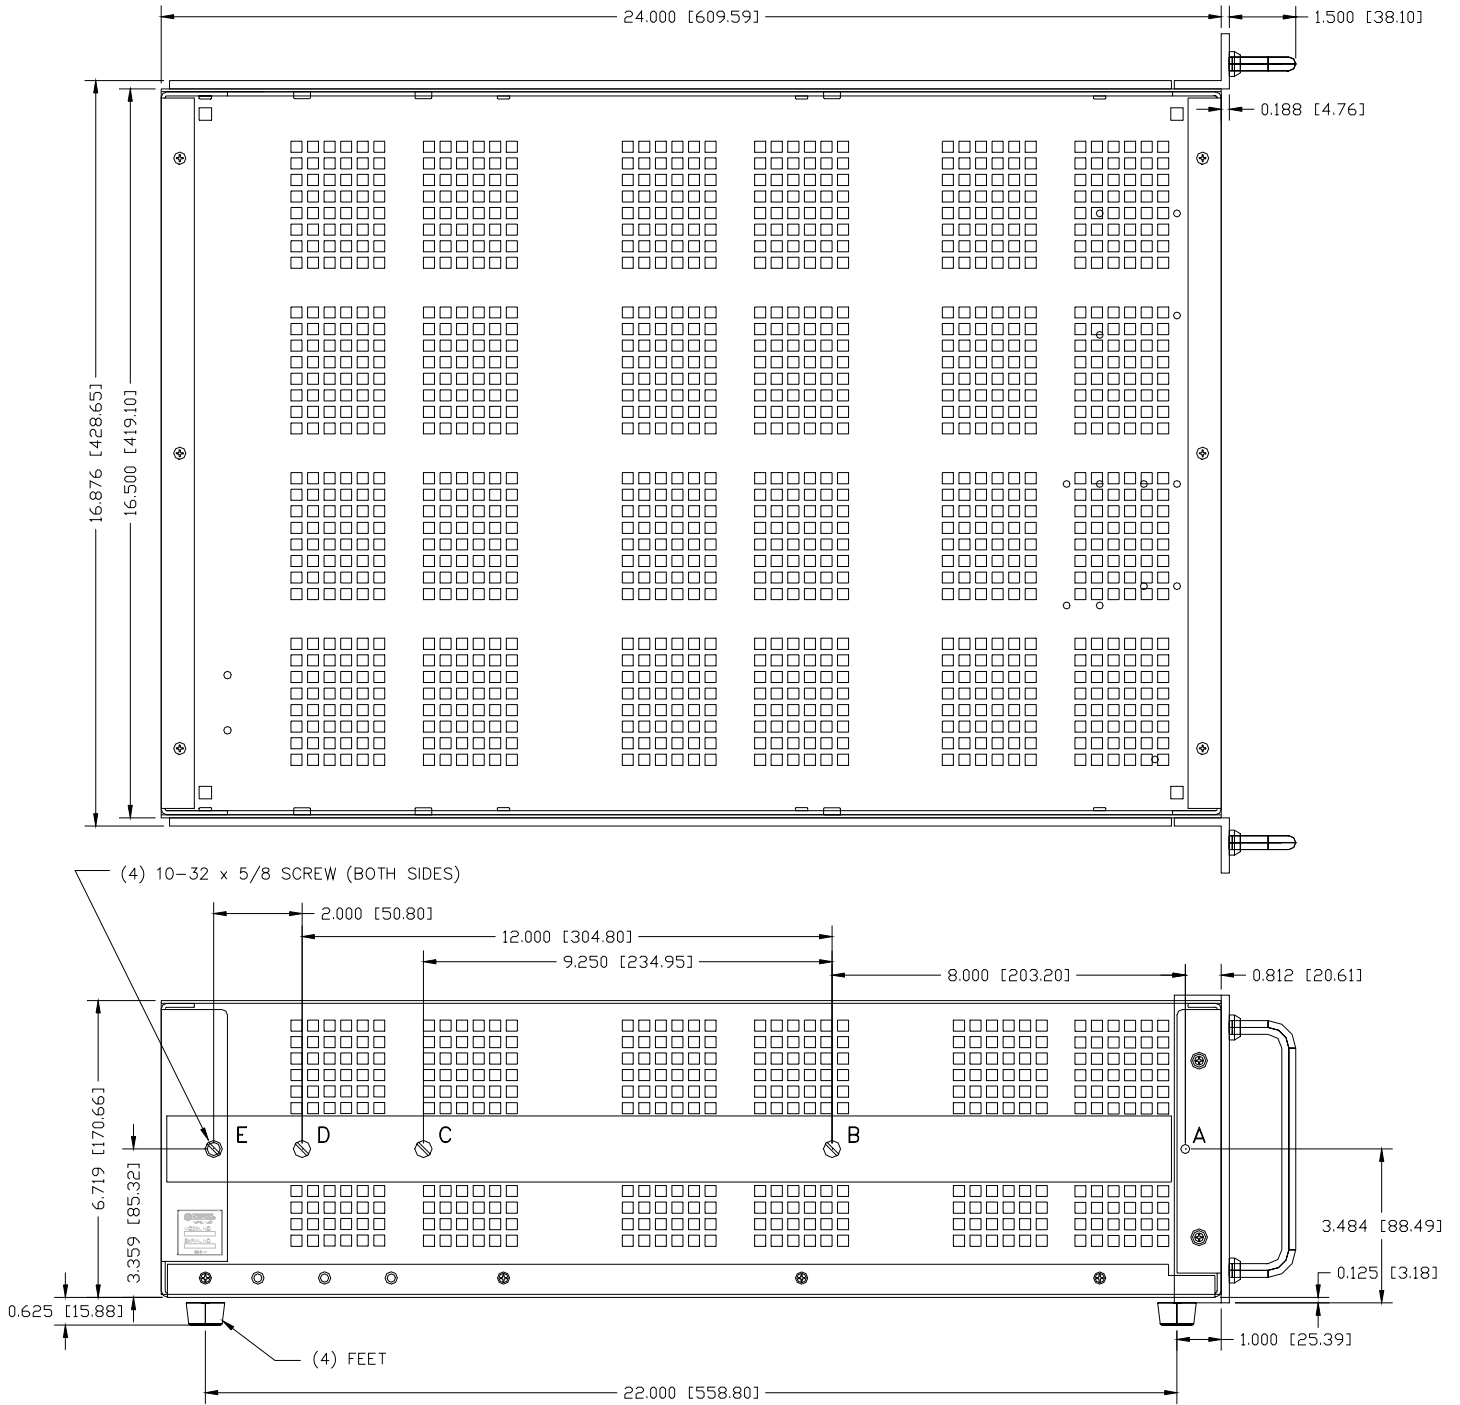


D3010292

| SLIDE TYPE KEPCO P/N | USED MOUNTING HOLE | | | | |
|-------------------------|--------------------|---|----------|----------|----------|
| | A | B | C | D | E |
| 110-QD-22-2 108-0156 | X | X | NOT USED | X | NOT USED |
| 110-QD-24-2 108-0192 | X | X | X | NOT USED | X |

USE SAME SCREW ALONG WITH BRACKET
SPACER TO MOUNT SLIDES.

FIGURE 2. RA 79 RACK ADAPTER OUTLINE DRAWING (SHEET 1 OF 3, TOP AND SIDE VIEWS)

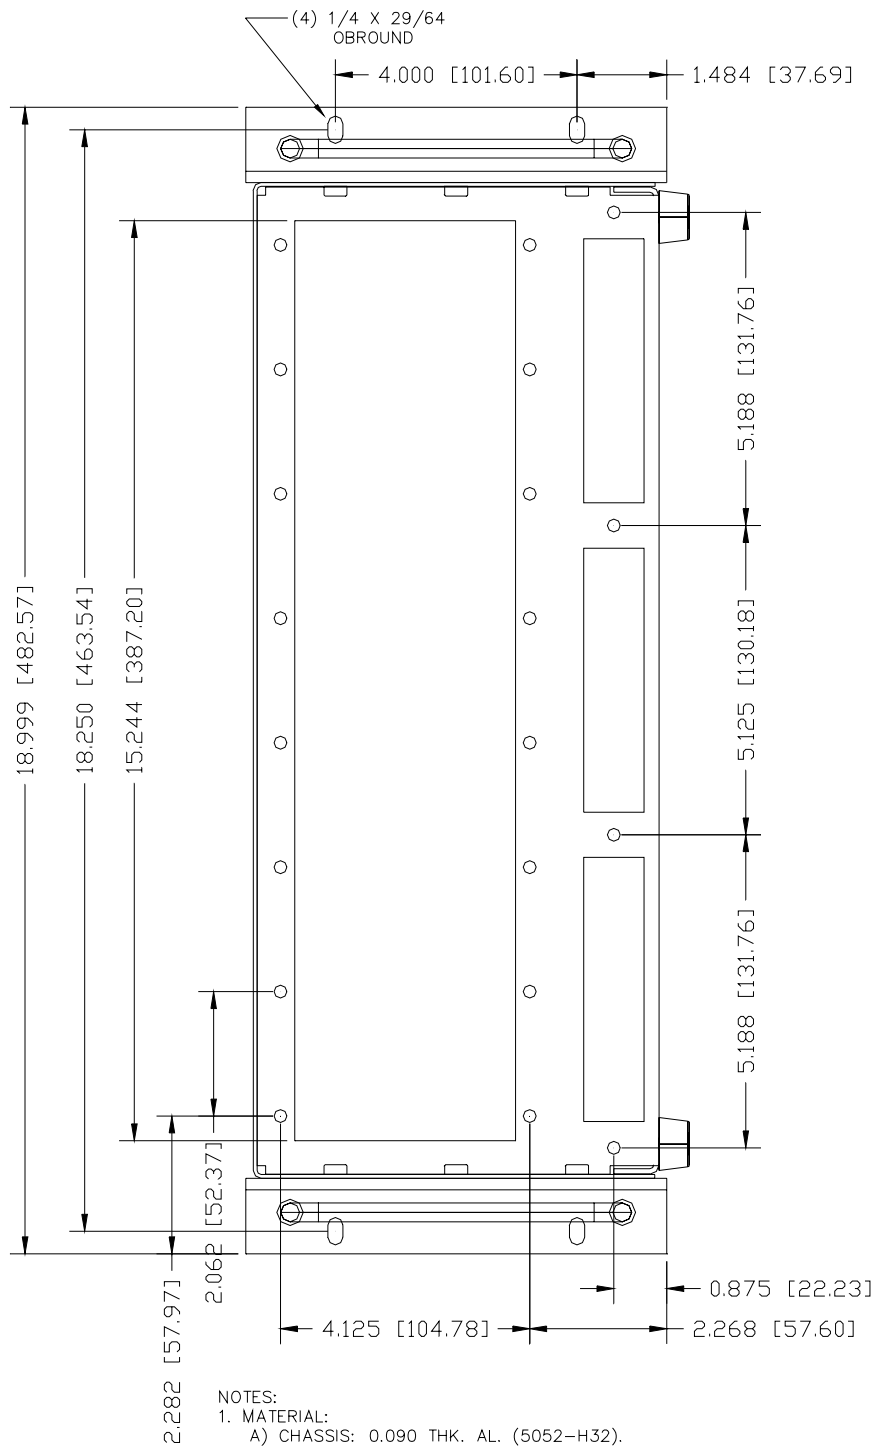

NOTES:

1. MATERIAL:

- A) CHASSIS: 0.090 THK. AL. (5052-H32).
- B) COVER: 0.064 THK. AL. (5052-H32).
- C) ANGLE BKT: 3/16 THK AL. (6063-T5)
- D) SPACER BKT: 3/16 THK AL. (6063-T5)

2. FINISH:

- A) CHASSIS, COVER & SPACER BKT: YELLOW IRIDITE MIL-C-5514A
- B) EAR BRACKET: LIGHT GRAY PER FEDERAL STD. 595, COLOR NO. 26440.

3. RACK OR CABINET MOUNTING: REMOVE (4) PLASTIC FEET.

4. IF INSTALLATION WITHOUT SLIDES IS DESIRED, THE UNIT MUST BE SUPPORTED BY A RIGID PLATFORM.

5. DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

6. TOLERANCES:

- A) BETWEEN MOUNTING HOLES: $\pm 1/64$ (± 0.4).
- B) ALL OTHER DIMENSIONS: $\pm 1/32$ (± 0.8) EXCEPT AS NOTED.

D3010292

FIGURE 2. RA 79 RACK ADAPTER OUTLINE DRAWING (SHEET 2 OF 3, FRONT VIEW)

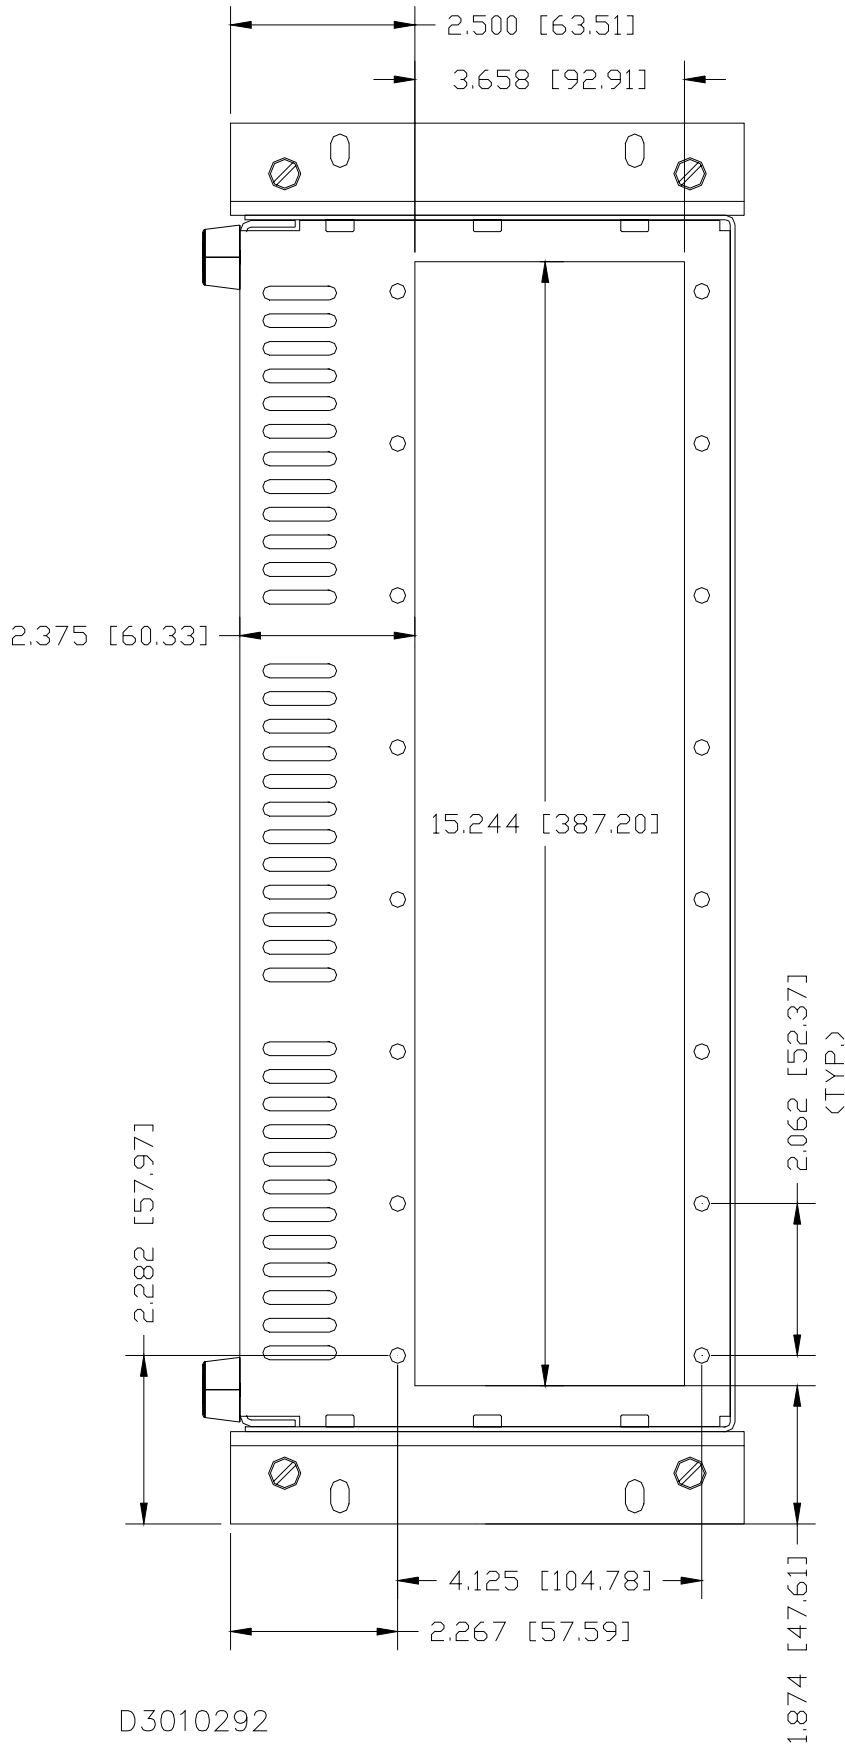


FIGURE 2. RA 79 RACK ADAPTER OUTLINE DRAWING (SHEET 3 OF 3, REAR VIEW)